

Features:

C21083C

Included Components:

- Combination
 - Bowl C239
 - Tank T330
 - Vitreous China
 - 12" Rough-In
 - 3" canister flush valve for faster water flow and flushing power
 - Extra-large Dual fed siphon jets for high power bowl clearing
 - Double nut, multi-point tank-to-bowl mounting system for tool-free installation
 - Chrome-plated top-mount one-button flush actuator
 - 100% glazed, 2" trapway for clog-free waste removal
 - Slow Close and Quick-release seat included for fast and easy cleaning
 - Wax ring, braided hose, floor bolts and bolts caps included
 - MaP 1000 g
- FINISH WALL



Technical Information:

Configuration	Two Piece ADA Elongated Toilet
Water per Flush	1.6 gpf(6.0 Lpf)/1.1 gpf(4.1 Lpf)
Rough-In	12"
Height	30 ⁵ / ₈ "
Width	15 ³ / ₈ "
Depth	27 ⁷ / ₈ "
Trapway	2"
Large Water Surface	8 ¹¹ / ₁₆ " x 6 ⁵ / ₁₆ "
Shipping weight	83.3 lbs

Accessories: (To be purchased separately)


N/A

Available Colors:

- White

Warranty:

- 5 YEARS limited warranty

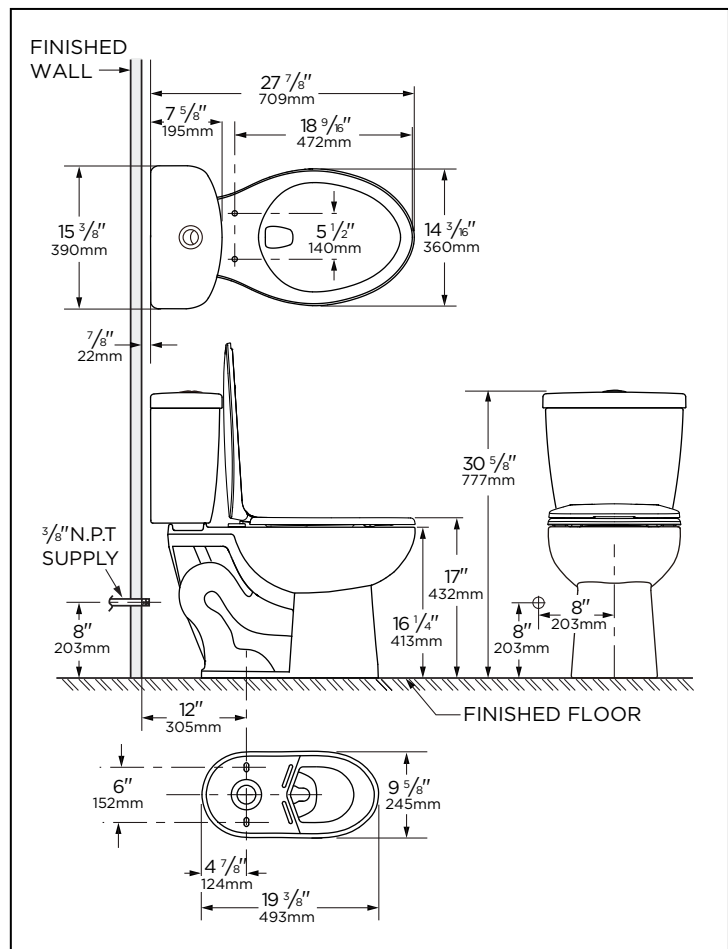

HIGH EFFICIENCY TOILET

HET



NOTES: All dimensions are in inches and millimeters. Illustrations may not be drawn to scale.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2/CSA B45.1
THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS EITHER AS HIGH EFFICIENCY WATER CLOSET
WITH AN AVERAGE CONSUMPTION OF 1.1 gpf (4.1 Lpf), OR A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE
CONSUMPTION OF 1.6 gpf (6.0 Lpf). WATER CLOSET CONSUMPTION IS DETERMINED BY THE TANK.