



## SPECIFICATION

### C22109C WATERCLOSET


#### Features:

- One Piece Toilet
- Elongated bowl, ADA height
- Dual flush 1.6 gpf (6.0 Lpf)/1.1 gpf(4.0Lpf)
- HET/WaterSense/UPC/CSA/MaP Certificate
- WDI fill valve, WDI 3" flush valve
- Top push button
- Quick-release and Soft-closing seat cover
- Wax ring, floor bolts with caps, braided hose
- Map – 1000g



#### Toilet Dimensions:



Height.....	28"
Width.....	15 3/4"
Depth .....	28"
Rough-in .....	12"
Trapway (min).....	2"

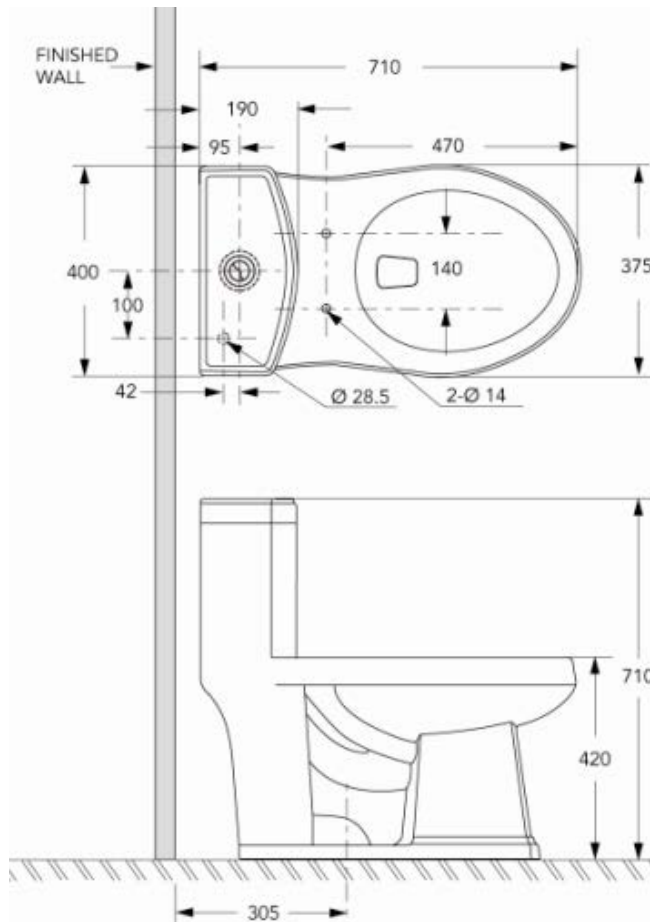



## SPECIFICATION

### C22109C WATERCLOSET

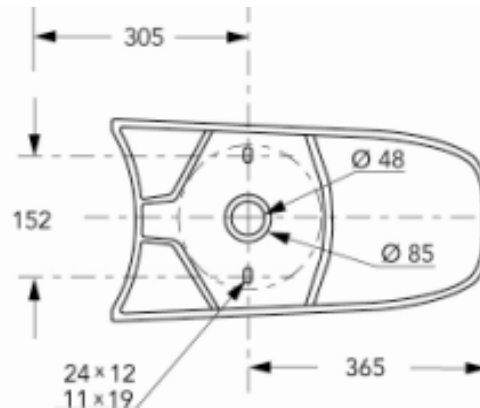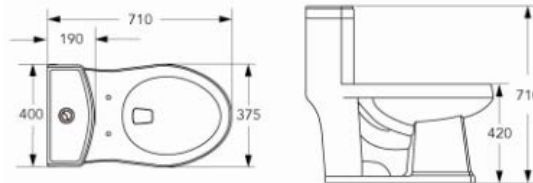

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6.0 Lpf) OR LESS.

#### IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6.0 Lpf) OR LESS.